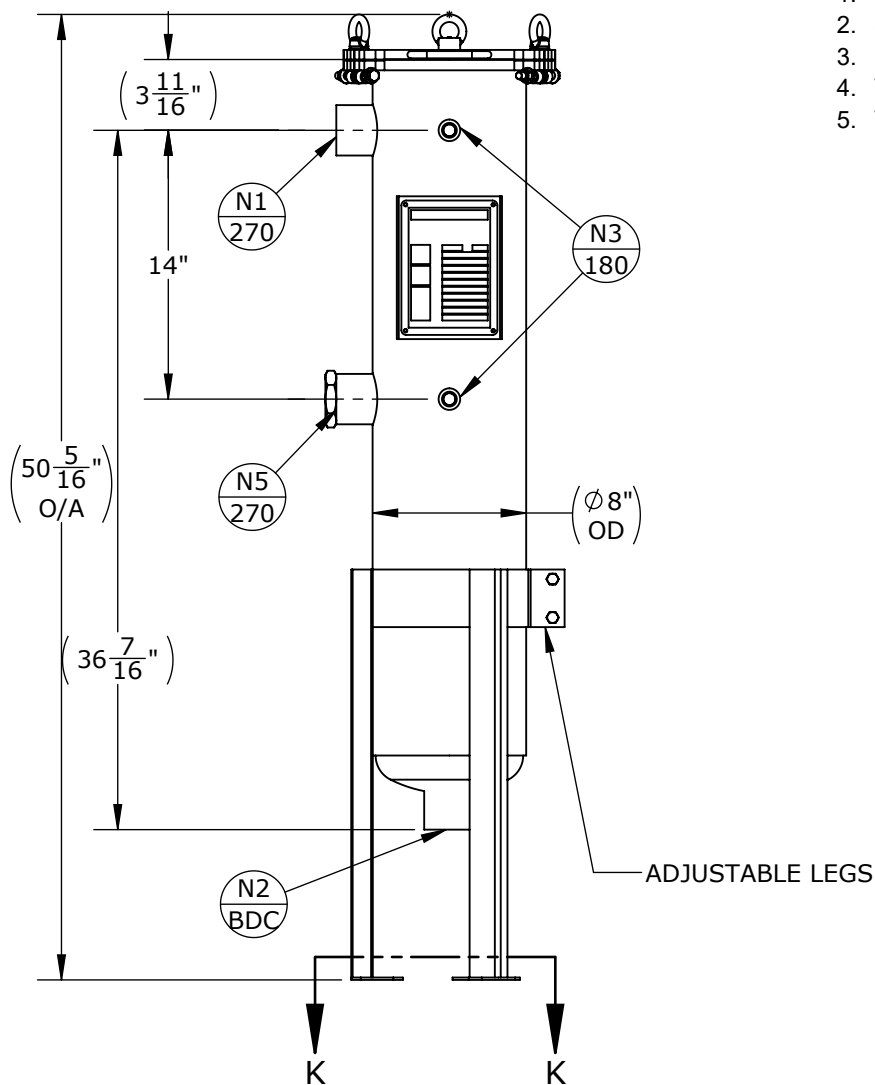
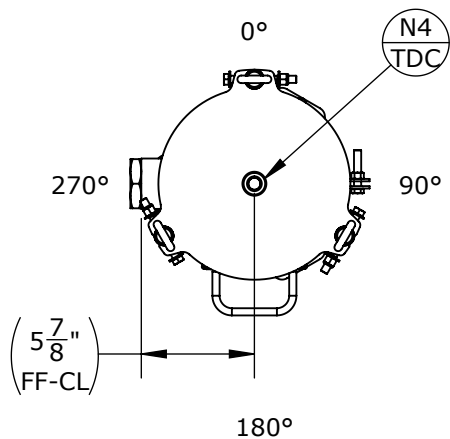


SECTION K-K

NOZZLE SCHEDULE


MARK	QTY	SIZE / RATING	DESCRIPTION
N1	1	2" 150# NPT	INLET
N2	1	2" 150# NPT	OUTLET
N3	2	1/2" 3000# NPT	PRESSURE GAUGE
N4	1	1/2" 3000# NPT	VENT
N5	1	2" 150# NPT	SPARE

VESSEL DESIGN CONDITIONS

CODE: BEST COMMERCIAL PRACTICE			
M.A.W.P.:	150 PSI @ 250°F	GASKET:	BUNA
M.A.W.P.:	FV PSI @ 250°F		
M.D.M.T.:	-20° F @ 150 PSI		
HYDROTEST PRESS:	150 PSI		
MATERIAL:	SS304		

NOTES:

1. VESSEL DRY WEIGHT: 76 LBS.
2. SHIPPING WEIGHT: 140 LBS.
3. FLOODED WEIGHT: 147 LBS.
4. VESSEL VOLUME: 1.05 CU. FT.
5. VESSEL WILL HOUSE (QTY=1) SIZE TWO SS304 BASKET

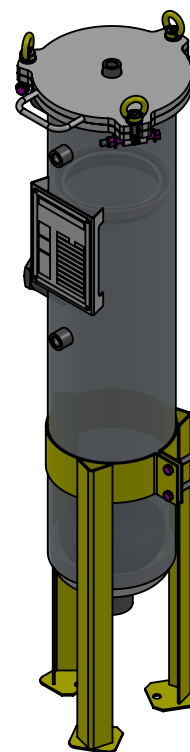

APPROVED WITH MARK-UPS ☐

APPROVED ☐



THIRD ANGLE
PROJECTION
TOLERANCES-UNLESS
OTHERWISE NOTED
DECIMAL .X = ±.1"
.XX = ±.02"
.XXX = ±.005"
FRACTIONAL .XXX = ±.005"
ANGULAR = ± 1°
MAX. MACHINED
SURFACE FINISH 125



FIL-TREK CORPORATION

55 Stafford Court
Cambridge, Ontario
N1T 1B3
Canada

Phone: (519) 623-7448
Fax: (519) 623-8807
Email: info@fil-trek.com
Website: www.fil-trek.com

THIS DRAWING IS THE PROPERTY OF 'FIL-TREK CORPORATION' AND MUST NOT BE COPIED OR USED IN ANY WAY DETRIMENTAL TO THE CORPORATION

EQUIPMENT: ESL SERIES (SINGLE BAG FILTER VESSEL)

MODEL NO: S4ESL112-2P-CDB-150

CUSTOMER: STOCK

PARENT:
NONE

DRAWN: DN
CHK'D: TS

DATE:
2025-01-28
SCALE: NTS

SERIAL No.
V16337

Part No.
002001-18521

REV. No.
0