
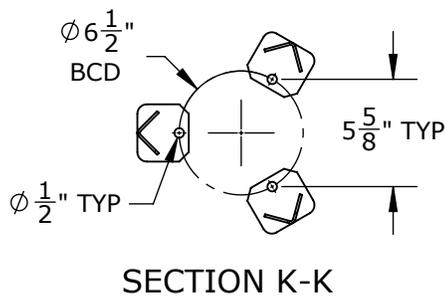
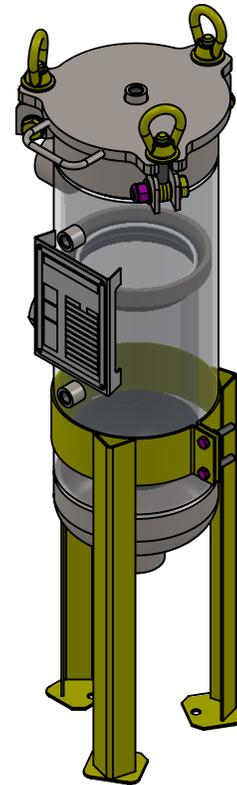


NOZZLE SCHEDULE			
MARK	QTY	SIZE / RATING	DESCRIPTION
N1	1	2" CL3000 NPT	INLET
N2	1	2" CL3000 NPT	OUTLET
N3	2	1/2" CL3000 NPT	PRESSURE GAUGE
N4	1	1/2" CL3000 NPT	VENT
N5	1	2" CL3000 NPT	SPARE
N6	0		DIRTY DRAIN

VESSEL DESIGN CONDITIONS	
CODE: ASME SECTION VIII DIV. 1, 2023 EDITION.	
M.A.W.P.: 150 PSI @ 400°F	M.D.M.T.: -20° F @ 150 PSI
M.A.W.P.: FV PSI @ 400°F	
CORROSION ALLOWANCE: N/A	HYDROTEST PRESS: 210 PSI
STAMP: UM	SERVICE: UNK. LIQUID NON LETHAL
PWHT: N/A	RADIOGRAPHY: N/A
MATERIAL: CS	GASKET: BUNA

NOTES:

1. VESSEL DRY WEIGHT: 113.000 LBS.
2. SHIPPING WEIGHT: 143 LBS.
3. FLOODED WEIGHT: 160 LBS.
4. VESSEL VOLUME: 0.75 CU. FT.
5. VESSEL WILL HOUSE (QTY=1) SIZE ONE SS304 BASKET

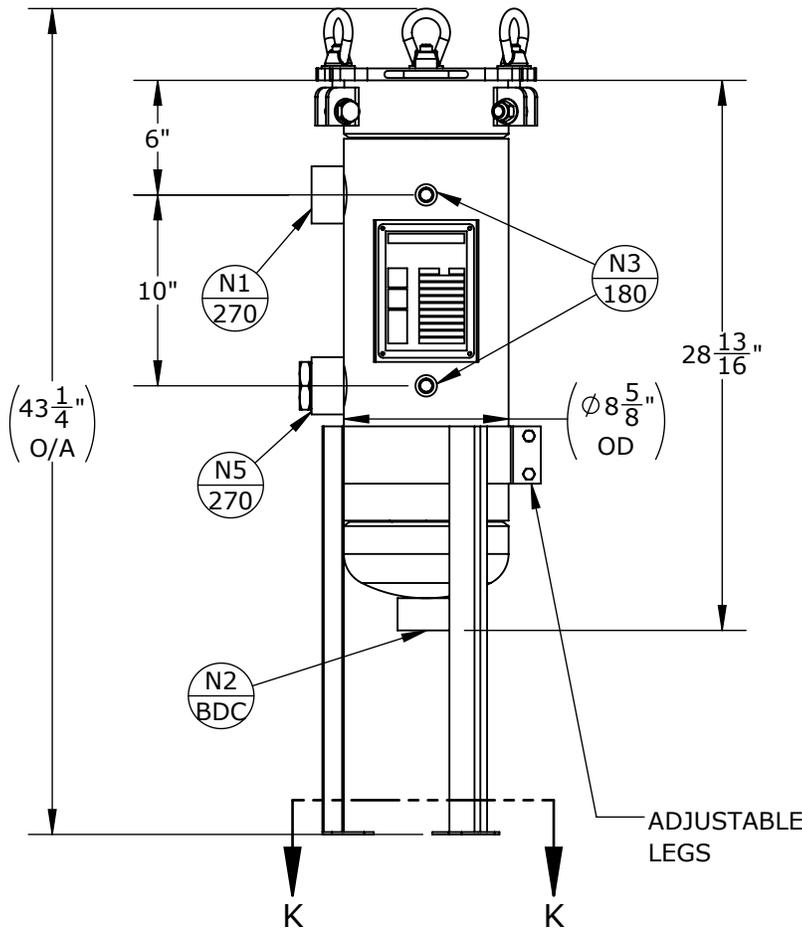

APPROVED WITH MARK-UPS APPROVED

<p>THIRD ANGLE PROJECTION</p> <p>TOLERANCES-UNLESS OTHERWISE NOTED</p> <p>DECIMAL .X = ±.1" .XX = ±.02" .XXX = ±.005"</p> <p>FRACTIONAL = ±1/8"</p> <p>ANGULAR = ± 1°</p> <p>MAX. MACHINED SURFACE FINISH 125/√</p>	<p>FIL-TREK CORPORATION</p> <p>55 Stafford Court Cambridge, Ontario N1T 1B3 Canada</p> <p>Phone: (519) 623-7448 Fax: (519) 623-8807 Email: info@fil-trek.com Website: www.fil-trek.com</p>				
	<p>THIS DRAWING IS THE PROPERTY OF 'FIL-TREK CORPORATION' AND MUST NOT BE COPIED OR USED IN ANY WAY DETRIMENTAL TO THE CORPORATION</p> <p>EQUIPMENT: SL SERIES (SINGLE BAG FILTER VESSEL)</p> <p>MODEL NO: SL111-2P-CDB-150</p> <p>CUSTOMER:</p>				
PARENT: NONE	DRAWN: JG	DATE: 2024-04-11	SERIAL No.	Part No. 002002-20563	REV. No. 0
	CHK'D: TS	SCALE: NTS			