
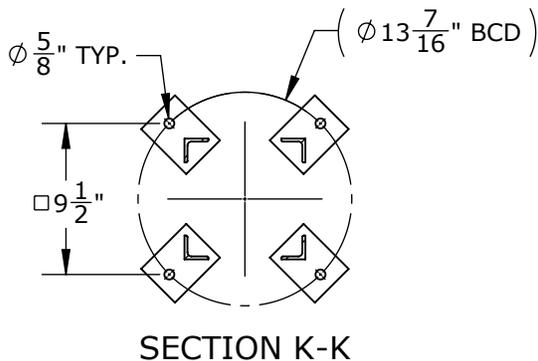
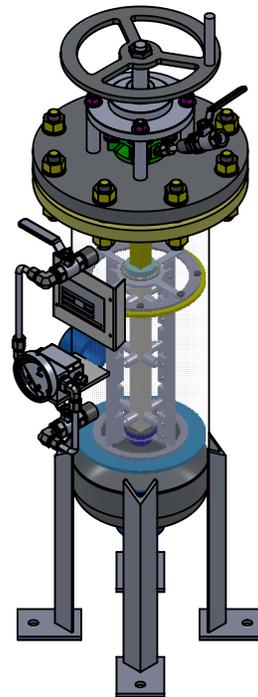


NOZZLE SCHEDULE			
MARK	QTY	SIZE / RATING	DESCRIPTION
N1	1	2" NPT CL3000	INLET
N2	1	2" NPT CL3000	OUTLET
N3	2	1/2" NPT CL3000	PRESSURE GAUGE
N4	1	1/4" THRU MECH SEAL	VENT
N5	1		CLEAN DRAIN
N6	1	2" NPT CL3000	DIRTY DRAIN

VESSEL DESIGN CONDITIONS			
CODE: BEST COMMERCIAL PRACTICE			
M.A.W.P.:	150 PSI @ 200°F	GASKET:	SPIRAL WOUND
M.A.W.P.:	FV PSI @ 200°F		
M.D.M.T.:	-20° F @ 150 PSI	HYDROTEST PRESS:	210 PSI
HYDROTEST PRESS:	210 PSI	SERVICE:	UNK LIQUID NON LETHAL
MATERIAL:	SS304	RADIOGRAPHY:	

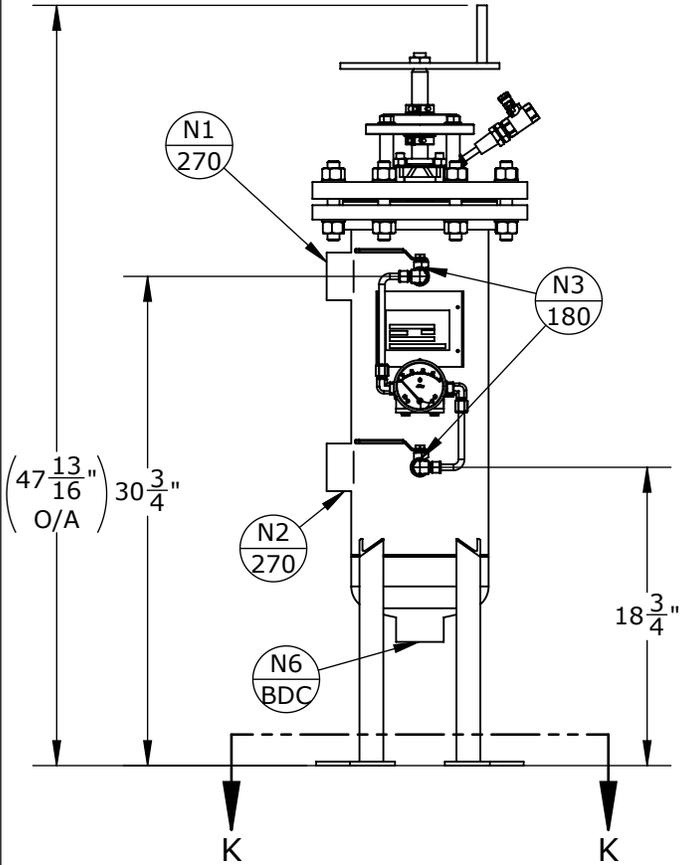

APPROVED WITH MARK-UPS APPROVED

<p>THIRD ANGLE PROJECTION TOLERANCES-UNLESS OTHERWISE NOTED</p> <p>DECIMAL .X = ±.1" .XX = ±.02" .XXX = ±.005"</p> <p>FRACTIONAL = ±1/8"</p> <p>ANGULAR = ± 1°</p> <p>MAX. MACHINED SURFACE FINISH 125/√</p>	<p>FIL-TREK CORPORATION 55 Stafford Court Cambridge, Ontario N1T 1B3 Canada</p> <p>Phone: (519) 623-7448 Fax: (519) 623-8807 Email: info@fil-trek.com Website: www.fil-trek.com</p>			
	<p>THIS DRAWING IS THE PROPERTY OF 'FIL-TREK CORPORATION' AND MUST NOT BE COPIED OR USED IN ANY WAY DETRIMENTAL TO THE CORPORATION</p> <p>EQUIPMENT: 98 SERIES AUTO STRAINER</p> <p>MODEL NO: S4E98-2P-100-S4-PT1-L1</p> <p>CUSTOMER: STOCK</p>			
PARENT: NONE	DRAWN: RS CHK'D: TS	DATE: 2020-05-01 SCALE: NTS	SERIAL No. V10801 Part No. 003011-00018	REV. No. 0